

Mud Shale Shaker

- Vibration strength can be adjusted
- Vibration track uniform
- Screen options more choice
- Vibrating Strength 7.5G



Mud Shale shaker

Linear Shale Shaker is the third generation of vibrating shaker. Linear Motion Shaker is using the horizontal excitation of vibration motor as vibration source, material on the sieve was up forward for linear motion, referred to as Linear Shaker, also known as linear shaker; Linear Motion Shaker is the most widely used shale Shaker. All Shaker is Tin Shui designed by ourselves, including Balanced Elliptical motion Shaker and Linear Motion shaker. All shaker screens can be fit on shakers by wedge blocks or hooks. We can according to customer's demand, linear motion, or balanced elliptical motion and double-track movement.

- **Vibration strength can be adjusted**
 - **Vibration track uniform**
 - **Screen options more choice**
- Vibrating Strength 7.5G**




Vibration strength can be adjusted



Wedge block design make the replacement more easy

Ex Standard:
ExdIIBt4 / IEC EX/ ATEX

Electrical Components:
SIEMENS, Schneide

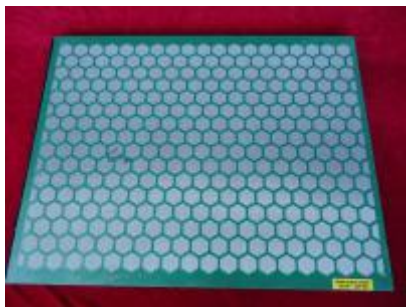

Screen options more choice



Shale Shaker Technical Parameters

| | | |
|---------------------------|-------------------------------------------------------------------------------------------|-------------------------|
| Model | TRZS703 | TRZS585 |
| Vibrating Model | Linear | Linear |
| Motor Power | 2x1.5KW | 2x1.72KW |
| Vibrating Strength | ≤7.0G | ≤7.5G |
| Amplitude | 6.0~7.2mm | 6.0~7.2mm |
| Capacity | 527GPM | 615GPM |
| Deck Adjustment | -1°~5° | -1°~5° |
| Screen of Deck | 3 | 4 |
| Electric | 380V/50HZ,460V/60HZ or Customized | |
| Decibels | <85db | <85db |
| Ex Standard | ExdIIBt4 / IEC EX/ ATEX | ExdIIBt4 / IEC EX/ ATEX |
| Dimension | 2800X1785X1750 | 2950X1600X1280 |
| Weight | 1550kg | 1850kg |
| Remarks | Treating capacity test from mud 1.2g/cm ³ density,viscosity45s & 60mesh screen | |

Shipping photos

Use Results


If you need to know more details about the shaker, then you contact us.

Company:Xian Tianrui Petroleum Machinery Equipment CO., LTD

TEL:86-29-86332919**FAX:**86-29-86332919 **E-mail:**sales@trsolidscontrol.com