

Shale Shaker

- Vibration strength can be adjusted
- Vibration track uniform
- Screen options more choice
- Vibrating Strength 7.5G



Mud Shale shaker

Linear Shale Shaker is the third generation of vibrating shaker. Linear Motion Shaker is using the horizontal excitation of vibration motor as vibration source, material on the sieve was up forward for linear motion, referred to as Linear Shaker, also known as linear shaker; Linear Motion Shaker is the most widely used shale Shaker. All Shaker is Tin Shui designed by ourselves, including Balanced Elliptical motion Shaker and Linear Motion shaker. All shaker screens can be fit on shakers by wedge blocks or hooks. We can according to customer's demand, linear motion, or balanced elliptical motion and double-track movement.

- **Vibration strength can be adjusted**
 - **Vibration track uniform**
 - **Screen options more choice**
- Vibrating Strength 7.5G**




Vibration strength can be adjusted



Wedge block design make the replacement more easy

Ex Standard:
ExdIIBt4 / IEC EX/ ATEX

Electrical Components:
SIEMENS, Schneide

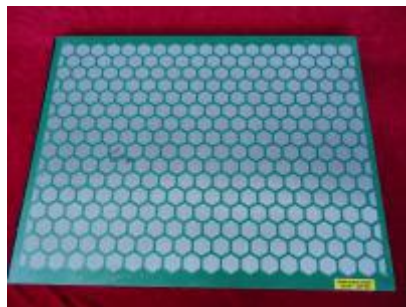

Screen options more choice



Shale Shaker Technical Parameters

Model	TRZS703	TRZS585
Vibrating Model	Linear	Linear
Motor Power	2×1.5KW	2×1.72KW
Vibrating Strength	≤7.0G	≤7.5G
Amplitude	6.0~7.2mm	6.0~7.2mm
Capacity	527GPM	615GPM
Deck Adjustment	-1°~5°	-1°~5°
Screen of Deck	3	4
Electric	380V/50HZ,460V/60HZ or Customized	
Decibels	<85db	<85db
Ex Standard	ExdIIBt4 / IEC EX/ ATEX	ExdIIBt4 / IEC EX/ ATEX
Dimension	2800X1785X1750	2950X1600X1280
Weight	1550kg	1850kg
Remarks	Treating capacity test from mud 1.2g/cm ³ density,viscosity45s & 60mesh screen	

Shipping photos

Use Results


If you need to know more details about the shaker, then you contact us.

Company:Xian Tianrui Petroleum Machinery Equipment CO., LTD

TEL:86-29-86332919**FAX:**86-29-86332919

E-mail:sales@trsolidscontrol.com